
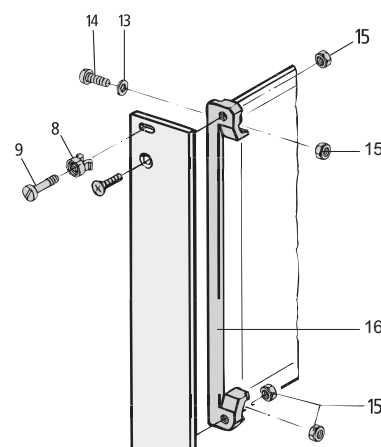


# Plug-in units – for IEC 60297, key form 2

## INDIVIDUAL COMPONENTS FIXING MATERIAL FOR EXTRACTOR HANDLES, KEY FORM 2

### FIXING MATERIAL FOR EXTRACTOR HANDLES, KEY FORM 2

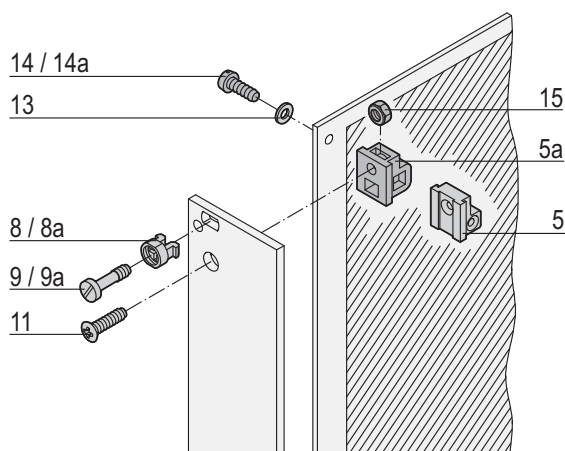


bga42545 04608137


| Fixing material                                                                                            | Item |                                                                                     | Required Qty |     | Qty/PU                         | Part no.         |
|------------------------------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------------|--------------|-----|--------------------------------|------------------|
|                                                                                                            |      |                                                                                     | 3 U          | 6 U |                                |                  |
| Board support, die-cast zinc, with thread M2.5, for front panel and PCB fixing                             | 5    |   | 1            | 2   | 1 piece (SPQ 10) <sup>1)</sup> | <b>60807-181</b> |
| Board support, plastic, PBT, UL 94 V-0, grey, with recess for hexagon nut M2.5, for fixing front panel     | 5a   |  | 1            | 2   | 1 piece (SPQ 10) <sup>1)</sup> | <b>60807-183</b> |
| Plastic sleeve, for form hole 5.9 x 3.3 PA, UL 90 V-2, grey                                                | 8    |  | 1            | –   | 100                            | <b>21100-464</b> |
| Metal sleeve, for form hole 5.9 x 3.3, press-in Stainless steel                                            | 8a   |  | 1            | –   | 100                            | <b>21100-662</b> |
| Pozidrive/slotted collar screw M2.5 x 11, St, nickel-plated                                                | 9    |  | 2            | 2   | 100                            | <b>21100-748</b> |
| Pozidrive/slotted collar screw M2.5 x 12.3, St, nickel-plated                                              | 9a   |  | 2            | 2   | 100                            | <b>21101-101</b> |
| Raised Pozidrive countersunk screw M2.5 x 8, St, nickel-plated                                             | 11   |  | 1            | –   | 100                            | <b>21100-429</b> |
| Washer 2.7 DIN 125, St, nickel-plated, 100 pieces                                                          | 13   |  | 2            | 2   | 100                            | <b>21100-721</b> |
| Pozidrive panhead screw M2.5 x 10, St, nickel-plated for item 5                                            | 14   |  | 2            | 2   | 100                            | <b>21101-220</b> |
| Panhead screw, self-tapping 2.5 x 8, St, zinc-plated for item 5b                                           | 14a  |  | 1            | –   | 100                            | <b>21100-710</b> |
| Hexagon nut M2.5, nickel-plated steel for item 5b                                                          | 15   |  | 3            | –   | 100                            | <b>21100-144</b> |
| PCB bracket 4 clearance holes for front panel/PCB fixing, 4 recesses for hexagon nuts; PBT, UL 94 V-0, red | 16   |  | 1            | 2   | 1 piece (SPQ 10)               | <b>60807-011</b> |

# Plug-in units – for IEC 60297, trapeziform

## INDIVIDUAL COMPONENTS

## PCB BRACKET FOR STATIC TRAPEZIFORM HANDLE

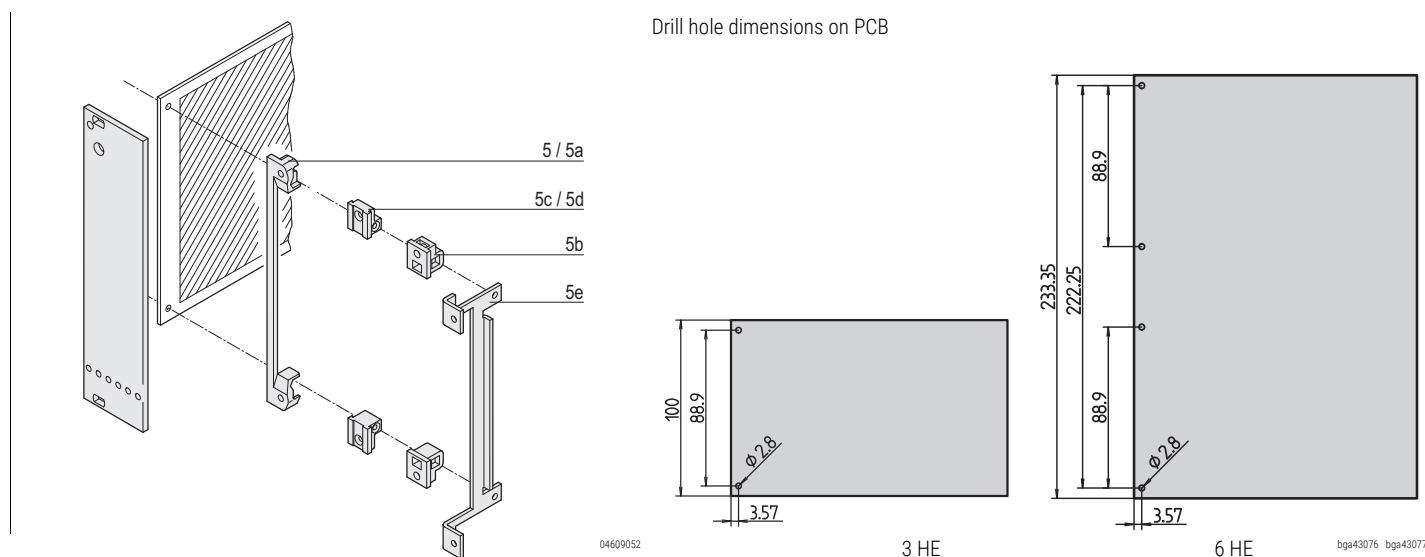

|                                                                                                                                                                                                                                | Item |                                                                                                 | Required Qty |     | Qty/PU                         | Part no.         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------------------------|--------------|-----|--------------------------------|------------------|
|                                                                                                                                                                                                                                |      |                                                                                                 | 3 U          | 6 U |                                |                  |
| <b>PCB bracket</b><br>4 clearance holes for front panel/PCB fixing,<br>4 recesses for hexagon nuts; PBT, UL 94 V-0, red                                                                                                        | 5    |               | 1            | 2   | 1 piece (SPQ 10) <sup>1)</sup> | <b>60807-011</b> |
| <b>PCB bracket</b><br>4 threads M2.5 for front panel/PCB fixing,<br>PBT, UL 94 V-0, grey, 1 piece                                                                                                                              | 5a   | <br>AZA45177 | 1            | 2   | 1 piece (SPQ 10) <sup>1)</sup> | <b>60807-211</b> |
| <b>PCB bracket</b><br>Clearance hole for front panel fixing, with recess for hexagon nut, drill hole for self-tapping screw for PCB fixing,<br>PBT, UL 94 V-0, grey, 1 piece                                                   | 5b   | <br>AZA45177 | 2            | 4   | 1 piece (SPQ 10) <sup>1)</sup> | <b>60807-183</b> |
| <b>PCB bracket</b><br>2 threads M2.5 for front panel/PCB fixing, die-cast zinc, 1 piece                                                                                                                                        | 5c   | <br>06707050 | 2            | 4   | 1 piece (SPQ 10) <sup>1)</sup> | <b>60807-181</b> |
| <b>PCB bracket</b><br>Thread M2.5 for front panel fixing, clearance hole for PCB fixing, die-cast zinc, 1 piece                                                                                                                | 5d   | <br>06707050 | 2            | 4   | 1 piece (SPQ 10) <sup>1)</sup> | <b>60807-203</b> |
| <b>PCB bracket</b><br>4 M2.5 threads for fixing front panel/PCB for recessed PCB mounting (20 mm), mounting depth 192.24 mm, St, zinc-plated;<br>not for europacPRO, multipacPRO, ratiopacPRO, propacPRO or compacPRO, 1 piece | 5e   | <br>AZA46586 | 1            | 2   | 1 piece (SPQ 10) <sup>1)</sup> | <b>30808-871</b> |