


Modules – Front panels


FRONT PANELS, U PROFILE, SHIELDABLE

2 HP

3 U

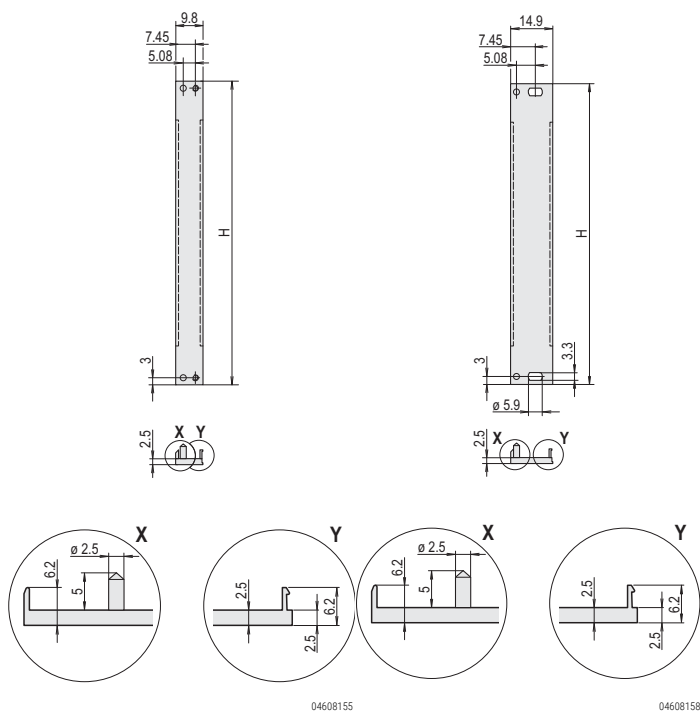

> 3 HP

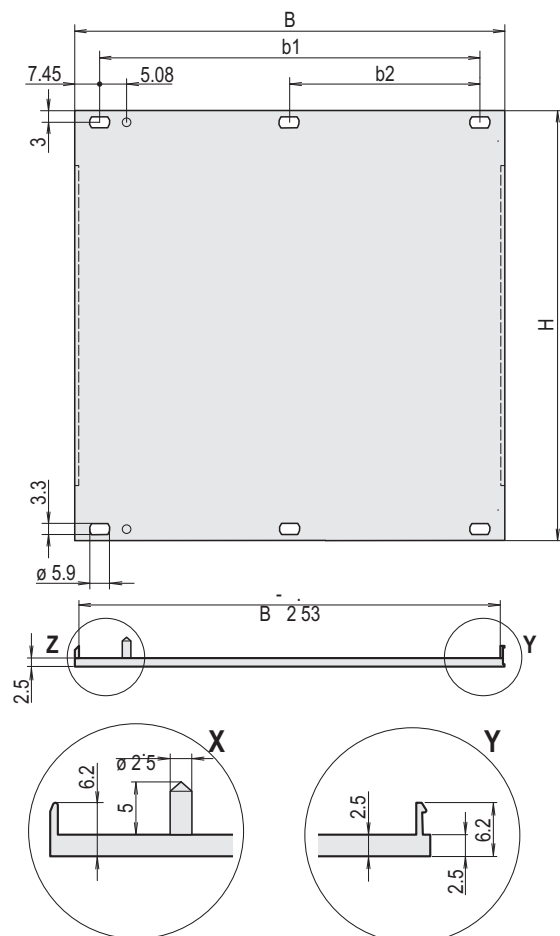

- High stability through U profile
- Front panel, U profile, Al, front anodised, rear conductive, 2 alignment pins pressed-in, stainless steel
- Differences in the finish between 2 ... 12 HP and 14 ... 84 HP

ORDER INFORMATION

Height H	Width	B	b1	b2	Alignment	Qty	Part no.
U	mm	HP	mm	mm	Pin		
2	84	28	141.9	127	–	x	1 (SPQ 5)1) 20848-206
2	84	42	213	198.1	101.6	x	1 20848-260
2	84	63	319.7	304.8	157.5	x	1 20848-261
2	84	84	426.4	411.5	203.2	–	1 20848-262
3	128.4	2	9.8	–	–	x	1 (SPQ 5)1) 30849-001
3	128.4	3	14.9	–	–	x	1 (SPQ 5)1) 30849-004
3	128.4	4	20	–	–	x	1 (SPQ 5)1) 30848-354
3	128.4	5	25	–	–	x	1 (SPQ 5)1) 30848-378
3	128.4	6	30.1	–	–	x	1 (SPQ 5)1) 30848-380
3	128.4	7	35.2	–	–	x	1 (SPQ 5)1) 30848-382
3	128.4	8	40.3	25.4	–	x	1 (SPQ 5)1) 30848-356
3	128.4	9	45.4	30.5	–	x	1 (SPQ 5)1) 30848-384
3	128.4	10	50.5	35.6	–	x	1 (SPQ 5)1) 30848-386
3	128.4	12	60.6	45.7	–	x	1 (SPQ 5)1) 30848-358
3	128.4	14	70.8	55.9	–	x	1 (SPQ 5)1) 20848-013
3	128.4	16	80.9	66	–	x	1 (SPQ 5)1) 20848-015
3	128.4	21	106.3	91.4	–	x	1 (SPQ 5)1) 20848-020
3	128.4	28	141.9	127	–	x	1 (SPQ 5)1) 20848-027
3	128.4	42	213	198.1	101.6	x	1 20848-047
3	128.4	63	319.7	304.8	157.5	x	1 20848-068
3	128.4	84	426.4	411.5	203.2	–	1 20848-097
4	172.9	28	141.9	127	–	x	1 (SPQ 5)1) 20848-268
4	172.9	42	213	198.1	101.6	x	1 20848-269
4	172.9	63	319.7	304.8	157.5	x	1 20848-270
4	172.9	84	426.4	411.5	203.2	–	1 20848-271
5	217.4	28	141.9	127	–	x	1 (SPQ 5)1) 20848-647
5	217.4	42	213	198.1	101.6	x	1 20848-648
5	217.4	63	319.7	304.8	157.5	x	1 20848-649
5	217.4	84	426.4	411.5	203.2	–	1 20848-650
6	261.8	2	9.8	–	–	x	1 (SPQ 5)1) 30849-002
6	261.8	4	20	–	–	x	1 (SPQ 5)1) 30848-355
6	261.8	5	25	–	–	x	1 (SPQ 5)1) 30848-379
6	261.8	6	30.1	–	–	x	1 (SPQ 5)1) 30848-381
6	261.8	7	35.2	–	–	x	1 (SPQ 5)1) 30848-383
6	261.8	8	40.3	25.4	–	x	1 (SPQ 5)1) 30848-357
6	261.8	9	45.4	30.5	–	x	1 (SPQ 5)1) 30848-385
6	261.8	10	50.5	35.6	–	x	1 (SPQ 5)1) 30848-387
6	261.8	12	60.6	45.7	–	x	1 (SPQ 5)1) 30848-359
6	261.8	14	70.8	55.9	–	x	1 (SPQ 5)1) 20848-106
6	261.8	16	80.9	66	–	x	1 (SPQ 5)1) 20848-108
6	261.8	21	106.3	91.4	–	x	1 (SPQ 5)1) 20848-113
6	261.8	28	141.9	127	–	x	1 (SPQ 5)1) 20848-120
6	261.8	42	213	198.1	101.6	x	1 20848-139
6	261.8	63	319.7	304.8	157.5	x	1 20848-160
6	261.8	84	426.4	411.5	208.3	–	1 20848-189
9	395.1	84	426.4	411.5	203.2	–	1 20848-280

1) Delivery is exclusively made in Standard Pack Quantity (SPQ): Please order at least 5 pieces or a multiple. Pricing is per individual item.

NOTE

- 2 ... 12 HP: one-part U-profile
- 14 ... 84 HP: multi-part U-profile (front panel with crimped profile)
- Please order fixing material (sleeves, collar screws) separately, see page 7.107
- Please order textile EMC gasket separately, see page 7.6