

# PC 1919 13 T



Sample image

**Order symbol:** PC 1919 13 T

**Product nbr:** 5330059

UL Code: 5320059

UL Name: UL PC 1919 13 T

**Description:** Enclosure. PC


**Remarks:** Transparent cover

**EAN:** 6418074005397

**EI. number:**

- Finland: 3423801
- Denmark:
- Sweden: 2539436

**Including:** Base with screws for mounting plate. cover with PUR gasket and polyamide cover screws.

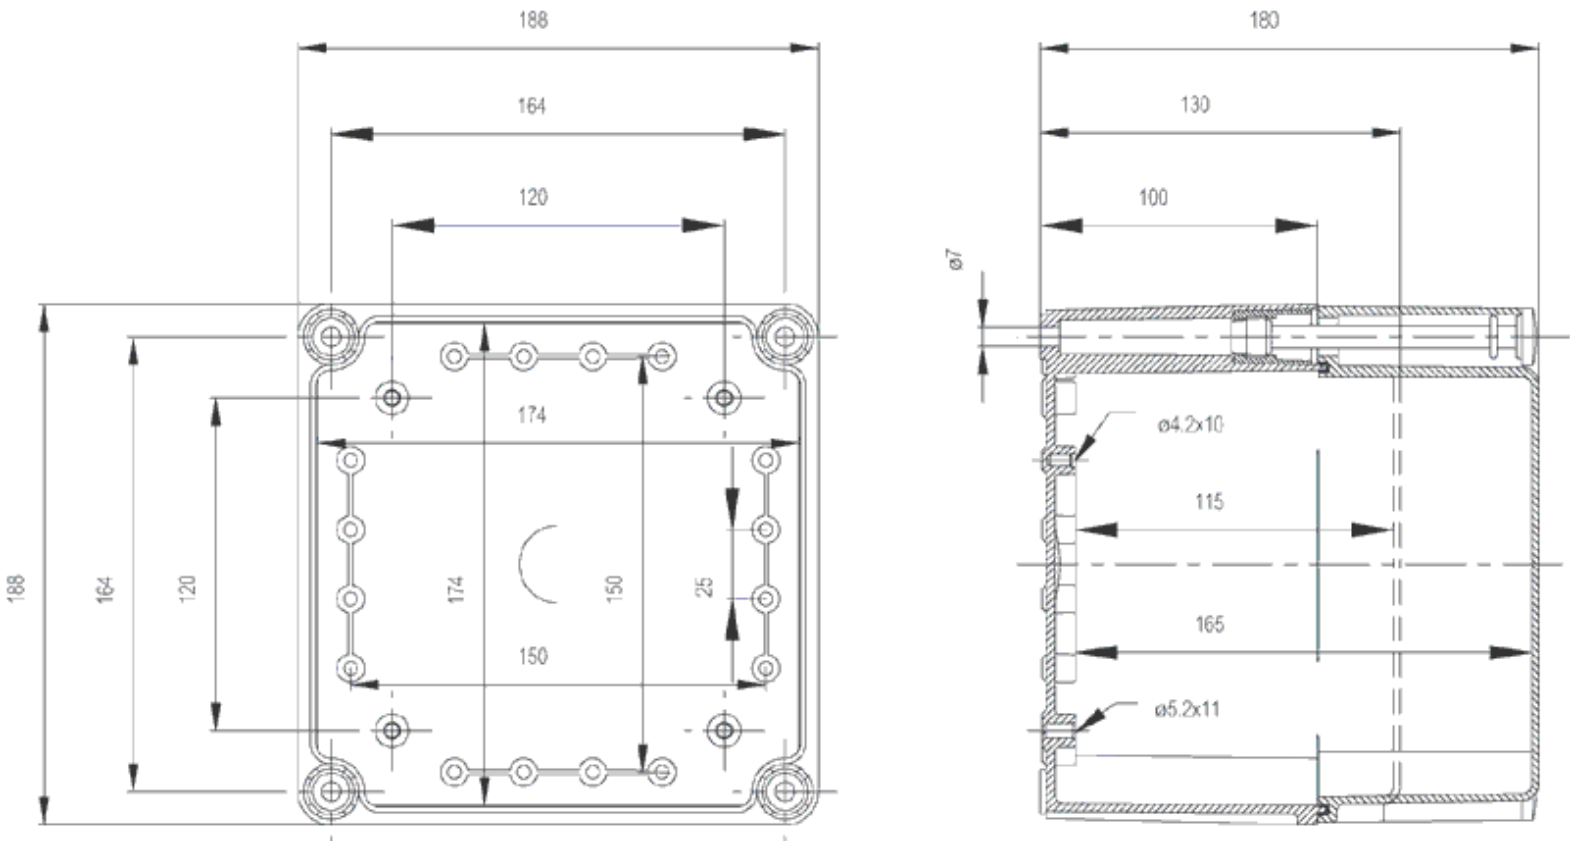

Dimensions:	Height	Width	Depth
mm:	190	190	130
inch:	7.48	7.48	5.12

**Accessories:**

- EKHVT Back Panel. for enclosures: (148 x 148 x 1)
- EKV 12 DIN-35 Mounting rail. for enclosures: (160 x 35 x 1)

**Materials:**

Material: Polycarbonate  
Base colour: RAL 7035 -light grey  
Cover colour: Clear transparent  
Gasket material: Polyurethane

**Temperatures:**

Temperature °C (short term):: -40 ... 120  
Temperature °C (continuous): -40 ... 80  
Temperature °F (short term): -40 ... 250  
Temperature °F (continuous): -40 ... 175

**Rating:**

Ingress protection (EN 60529): IP66; IP67;  
Impact Resistance (EN 62262): IK08;  
Electrical insulation: Totally insulated  
Halogen free (DIN/VDE 0472, Part 815): 1  
UV resistance: UL 508  
Flammability Rating: UL 746C 5"  
Glow Wire Test (IEC 695-2-1) °C: 960 °C  
NEMA Class

**Certificates:**

Certificate NCS FI 30308